


STIROTERMAL BASIC 15/30

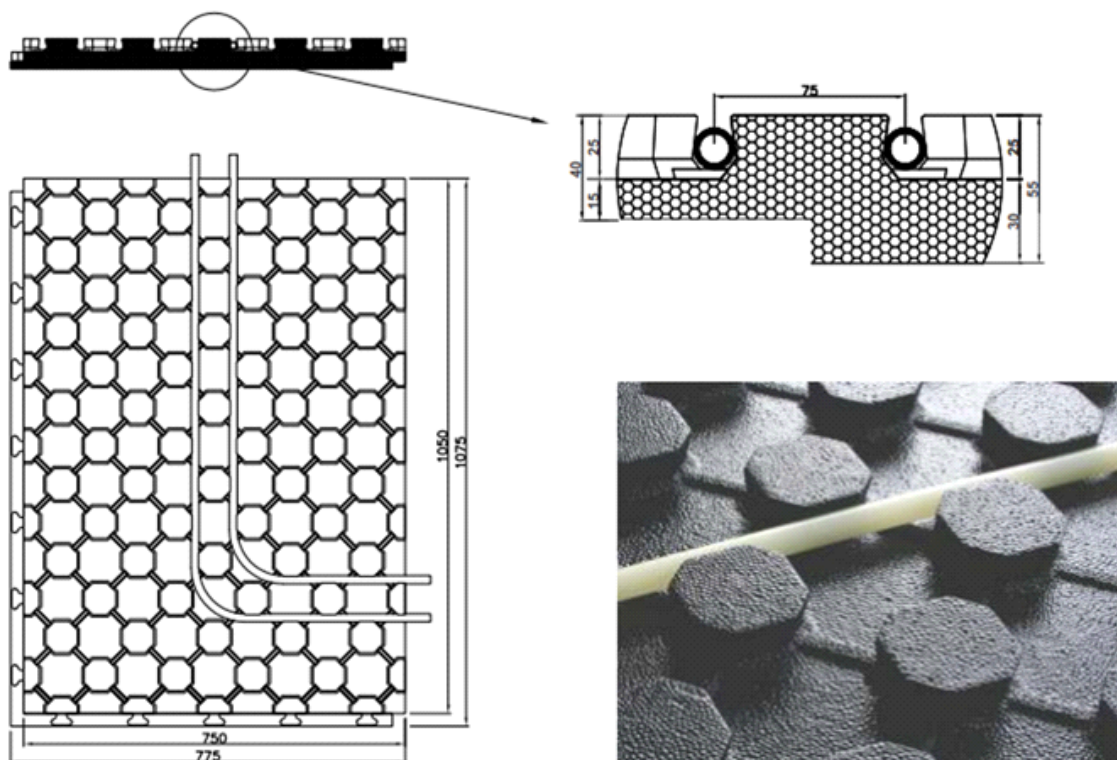

TEHNIČNI PODATKI- TECHNISCHE DATEN- TECHNICAL DATA

Premer cevi – <i>Rohrdurchmesser</i> – Pipe diameter:	16-20 mm
Razdalja med cevmi – <i>Verlegeabstand</i> – Pipe spacing:	75, 150, 225 mm
Izolacijski material – <i>Dämmstoff</i> – Insulation material:	EPS
Oznaka – <i>Bezeichnung</i> – Designation:	EPS-EN 13163-L(3)-W(3)-T(2)-S(2)-P(5)-BS200-CS(10)120-DS(N)5-DS(70,-)2 EPS-EN 13163-L(3)-W(3)-T(2)-S(5)-P(5)-BS200-CS(10)120-DS(N)5-DS(70,-)2
Koristna velikost – <i>Nutzgröße</i> – Usable size:	1050 x 750 mm
Koristna površina – <i>Nuttoberfläche</i> – Usable surface:	0,79 m ²
Skupna velikost – <i>Gesamtgröße</i> – Total size:	1075 x 775 mm
Skupna debelina – <i>Gesamtdicke</i> – Total thickness:	40 / 55 mm
Skupna debelina izolacije – <i>Gesamtisolationdicke</i> – Total insulation thickness:	15 / 30 mm
Koeficient toplotne prevodnosti – <i>Wärmeleitfähigkeit</i> – Thermal resistance factor:	0,036 W/mK
Toplotna upornost plošče – <i>Wärmedurchlasswiderstand</i> – Heat admission resistance:	0,40 / 0,80 m ² K/W
Tlačna trdnost (10% def.) – <i>Drückspannung (bei 10% Stauchung)</i> – Compressive stress (10% def.):	≥ 120 kPa
Dovoljena obtežba – <i>Zulässige Druckbelastbarkeit</i> – Acceptable load:	24 kPa ≈ 2400 kg/m ²
Temp. obstojnost oblike – <i>Wärmeformbeständigkeit</i> – Heat form resistance:	80 °C
Razred gorljivosti – <i>Brandverhalten</i> – Fire classification – EN 13501-1 / DIN 4102:	E / B1
Folija (material, debelina) – <i>Folie (Stoff, Dicke)</i> – Foil (material, thickness):	PS 0,18 mm
Barva folije – <i>Folienfarben</i> – Foil colour:	črna- Schwarz- black
Pakiranje kartonska škatla [kos] – <i>Verpackung Karton [Stück]</i> – Packaging carton box [pcs]- 1145 x 795 x 600 mm	Basic 15: 21 → 16,54 m ² Basic 30: 13 → 10,24 m ²
Pakiranje PE folija [kos] – <i>Verpackung PE Folie [Stück]</i> – Packaging PE foil [pcs]- 1140 x 780 x 450 mm	Basic 15: 14 → 11,03 m ² Basic 30: 10 → 7,88 m ²

*The product complies with EN 131363:2012+A1:2015 and Regulation (EU) No. 305/2011. Declaration of performance **Basic 15: DoP-04-TI- 006 / 26 - 01, Basic 30: DoP-04-TI- 007 / 26 - 01.**